


## アモルファスシリコン太陽電池 仕様

Model : AM-8804C-T

## 1. Outside dimensions 外形寸法

Light Receiving Side (受光面)

Overcoat Side (オーバーコート面)

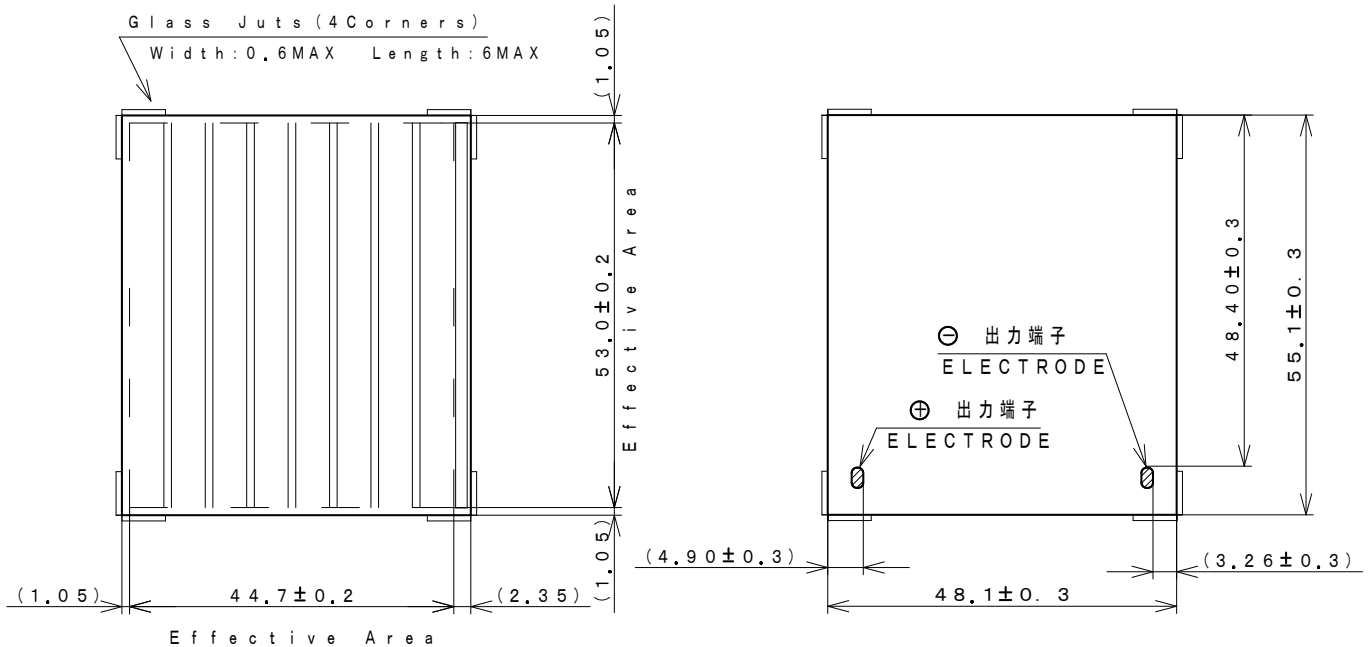

(dimension : mm)

## Note

Glass Substrate Thickness (ガラス基板厚) : 1.6mm ± 0.2  
 Module Thickness (モジュール厚) : 2.0mmMAX  
 Accepts normal soldering for bending  
 (一般の半田を使用してリード線付けが可能です。)

## 2. Rated Specifications (at 25℃)

Item	Specifications (Initial)		
2.1 Open circuit voltage : Voc 開放電圧	Typical	6.8V	at 50kLx SS
2.2 Short circuit Current : Isc 短絡電流	Typical	16.3mA	at 50kLx SS
2.3 Operating Voltage & Operating Current : Vope-Iope 動作特性	Typical	4.5V - 12.0mA	at 50kLx SS
	Typical	4.5V - 15.1mA	at 50kLx SS
	Typical	4.5V - 33.3mA	at AM-1.5 100mW/cm <sup>2</sup>
2.4 Maximum output : Pmax & optimum operating Volt : Vop optimum operating Current : Iop 最大出力	(reference)	74mW	Vop=5.2V Iop=14.2mA at 50kLx SS
	(reference)	156mW	Vop=5.2V Iop=30.0mA at AM-1.5 100mW/cm <sup>2</sup>
2.5 Working temperature range : Topr 動作温度範囲		-10 to 60℃	
2.6 Storage temperature range : Tstg 保存温度範囲		-20 to 70℃	



## アモルファスシリコン太陽電池 仕様

Model : AM-8804CAR-T

## 1. Outside dimensions 外形寸法

Light Receiving Side (受光面)

Overcoat Side (オーバーコート面)

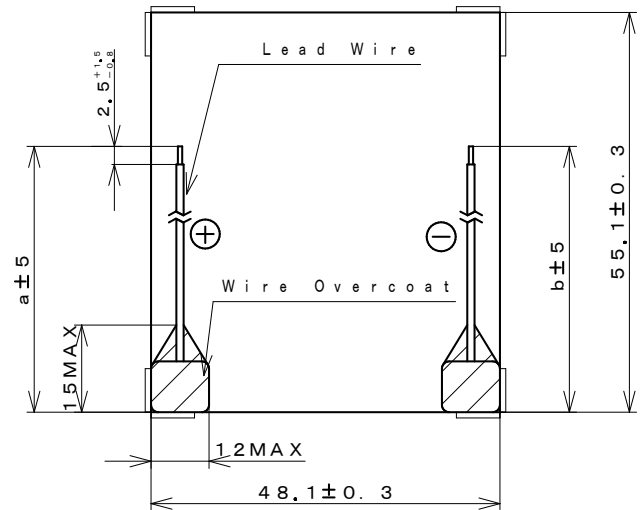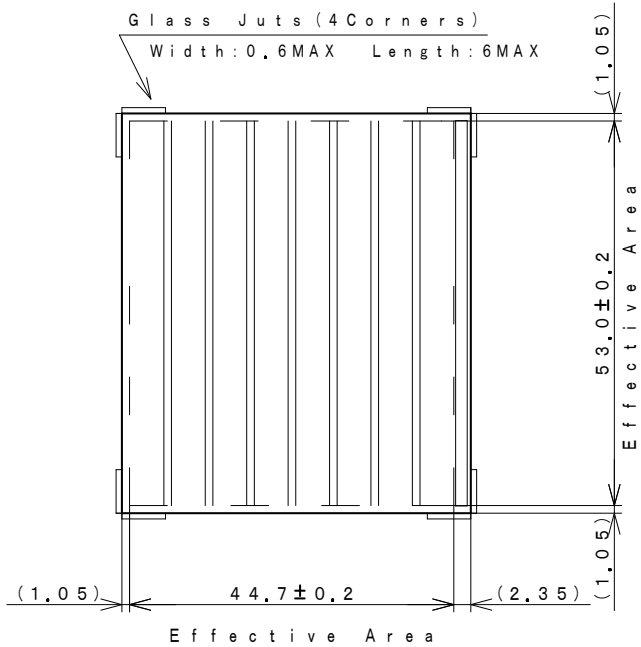

(dimension: mm)

Lead Wires : AWG30	
a : 90	b : 90

## Note

Glass Substrate Thickness (ガラス基板厚) : 1.6 mm ± 0.2

Module Thickness (モジュール厚) : 2.0 mm MAX

Wire-Overcoat Thickness : 3.1 mm MAX (including Module)  
(リード線補正コート厚)

## 2. Rated Specifications (at 25°C)

Item	Specifications (Initial)		
2.1 Open circuit voltage: Voc 開放電圧	Typical	6.8 V	at 50 kLx SS
2.2 Short circuit Current: Isc 短絡電流	Typical	16.3 mA	at 50 kLx SS
2.3 Operating Voltage & Operating Current: Vope-Iope 動作特性	Typical	4.5 V - 12.0 mA	at 50 kLx SS
	Typical	4.5 V - 15.1 mA	at 50 kLx SS
	Typical	4.5 V - 33.3 mA	at AM-1.5 100 mW/cm <sup>2</sup>
2.4 Maximum output: Pmax & optimum operating Volt: Vop optimum operating Current: Iop 最大出力	(reference)	74 mW	Vop=5.2 V Iop=14.2 mA at 50 kLx SS
	(reference)	156 mW	Vop=5.2 V Iop=30.0 mA at AM-1.5 100 mW/cm <sup>2</sup>
2.5 Working temperature range: Topr 動作温度範囲	-10 to 60°C		
2.6 Storage temperature range: Tstg 保存温度範囲	-20 to 70°C		

SS: Solar Simulator


# I - V Characteristics

REFERENCE

1.Model : AM-8804

2.Outside Dimension : 48.1mm × 55.1mm

SS:Solar Simulator

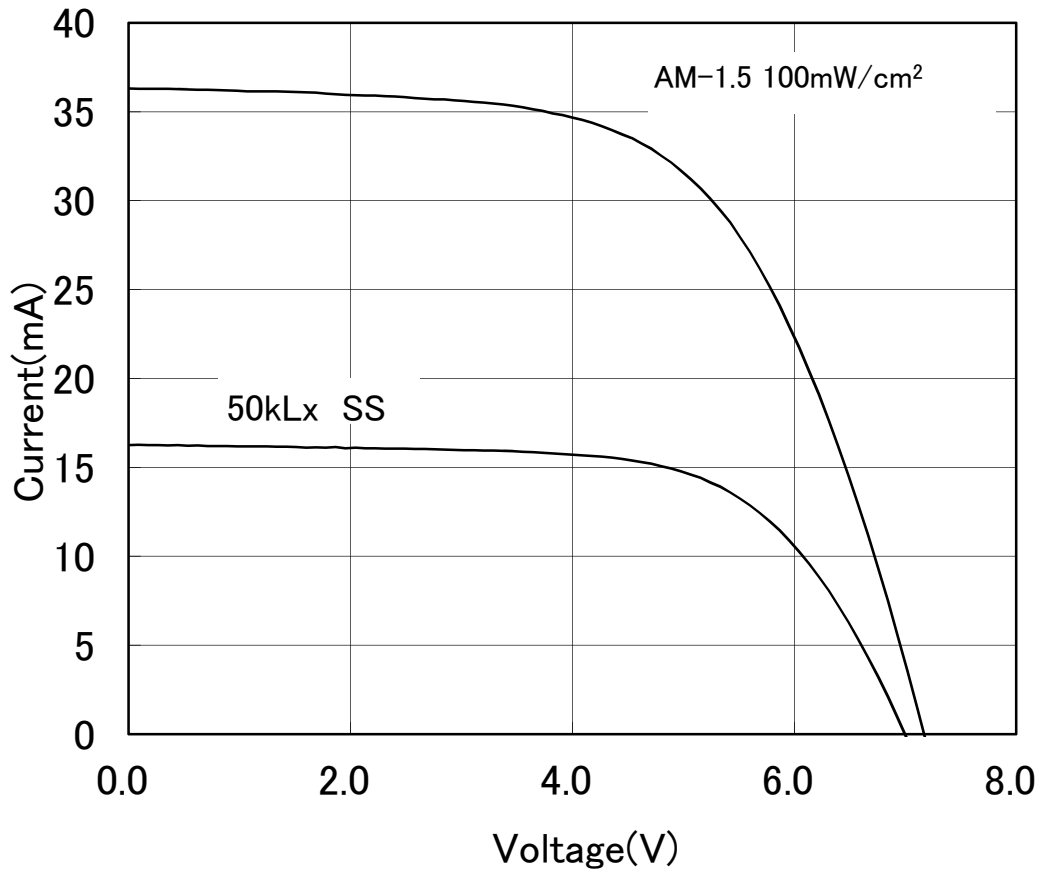

\*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

\*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.

Panasonic Solar Amorton Co.,Ltd.

2019/7/2


# 出力の照度依存特性

REFERENCE

## Dependence of Output on Illumination

1.Model : AM-8804

2.Outside Dimension : 48.1mm × 55.1mm

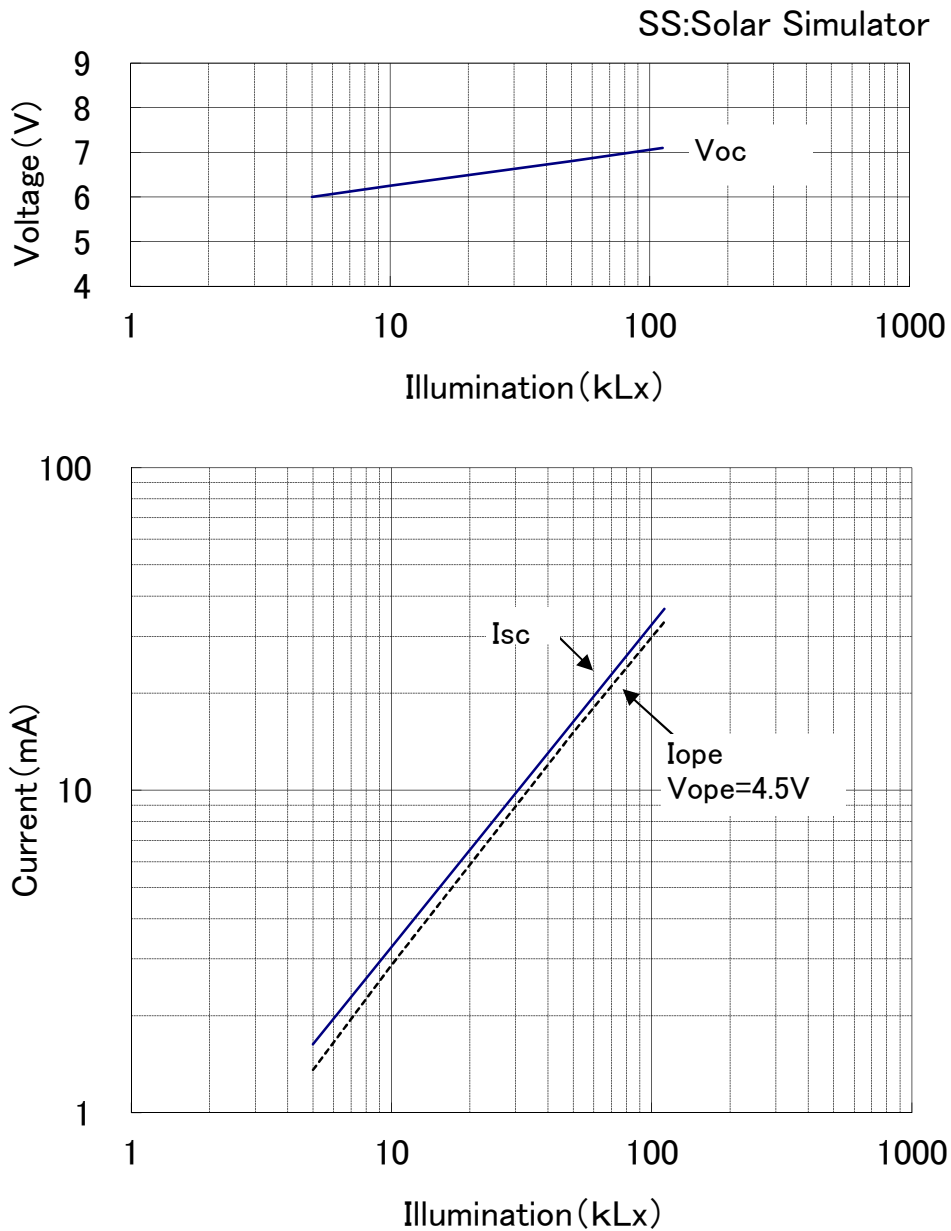

\*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

\*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.



# 出力の温度依存特性

REFERENCE

Dependence of Output on Temperature

1.Model : AM-8804

2.Outside Dimension : 48.1mm × 55.1mm

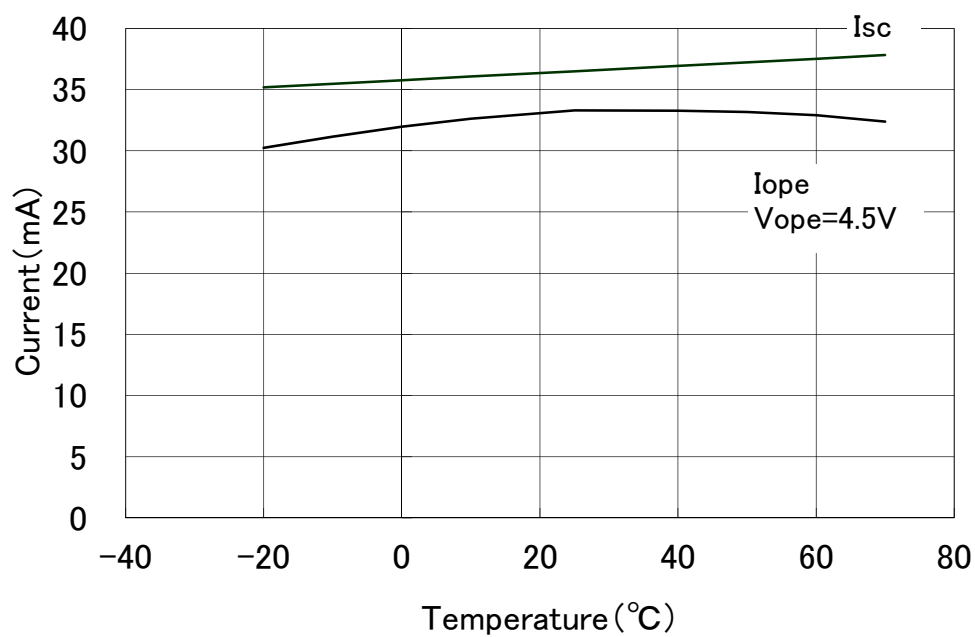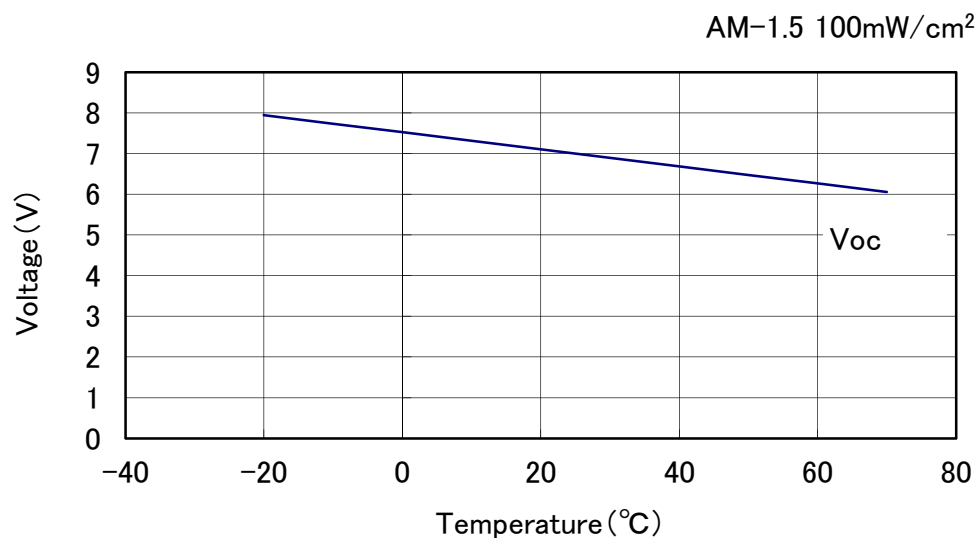

\*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

\*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.