



DO NOT SCALE DRAWING

Light Receiving Side

Back Side

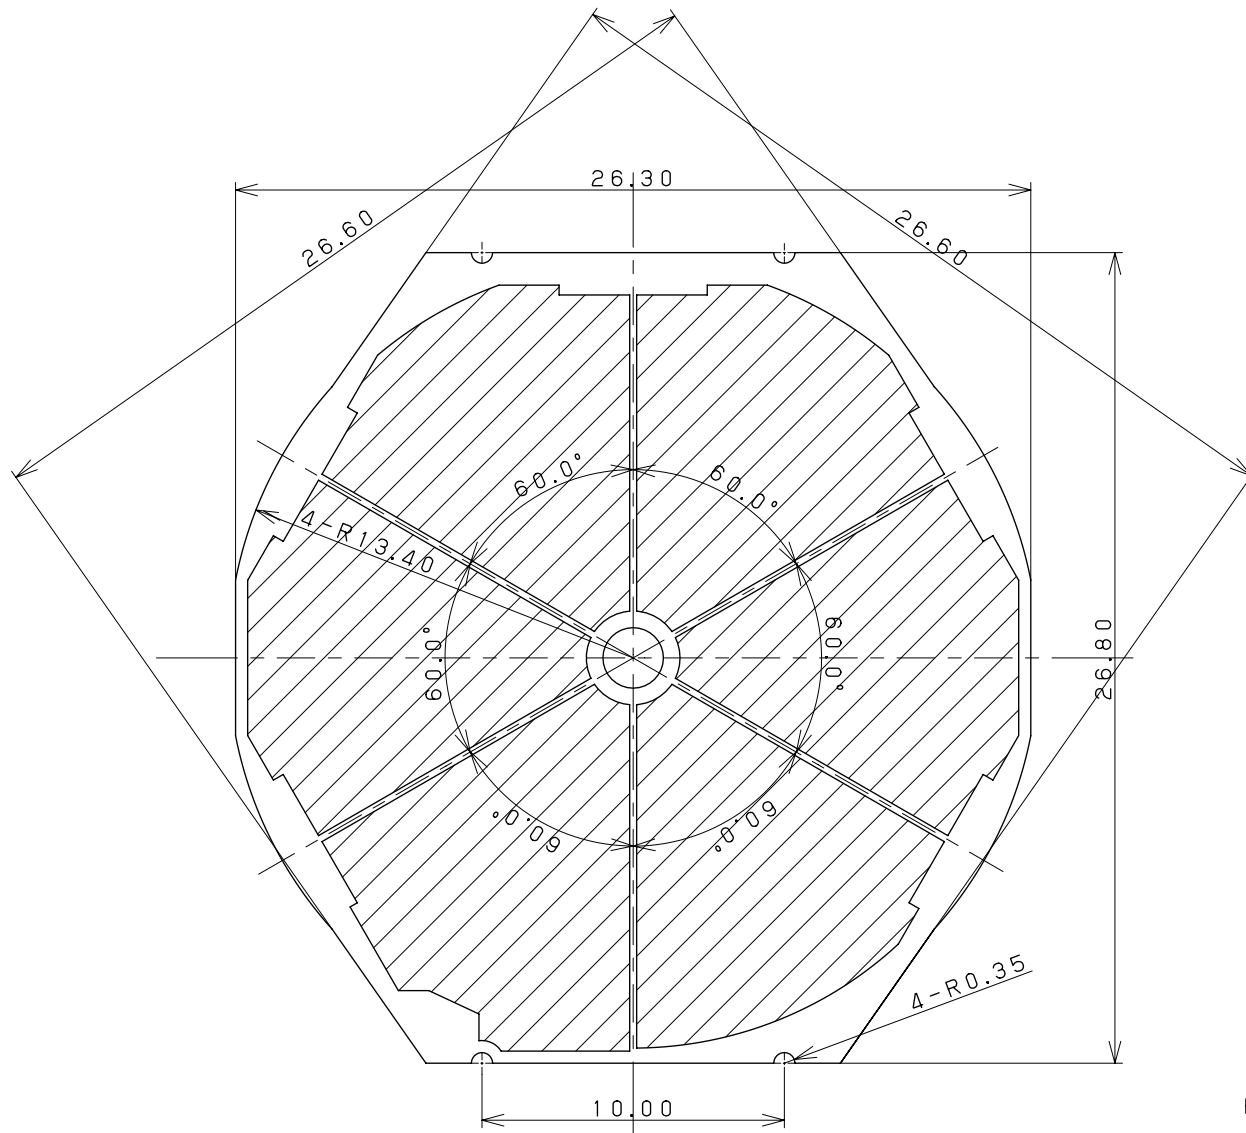

Effective Area

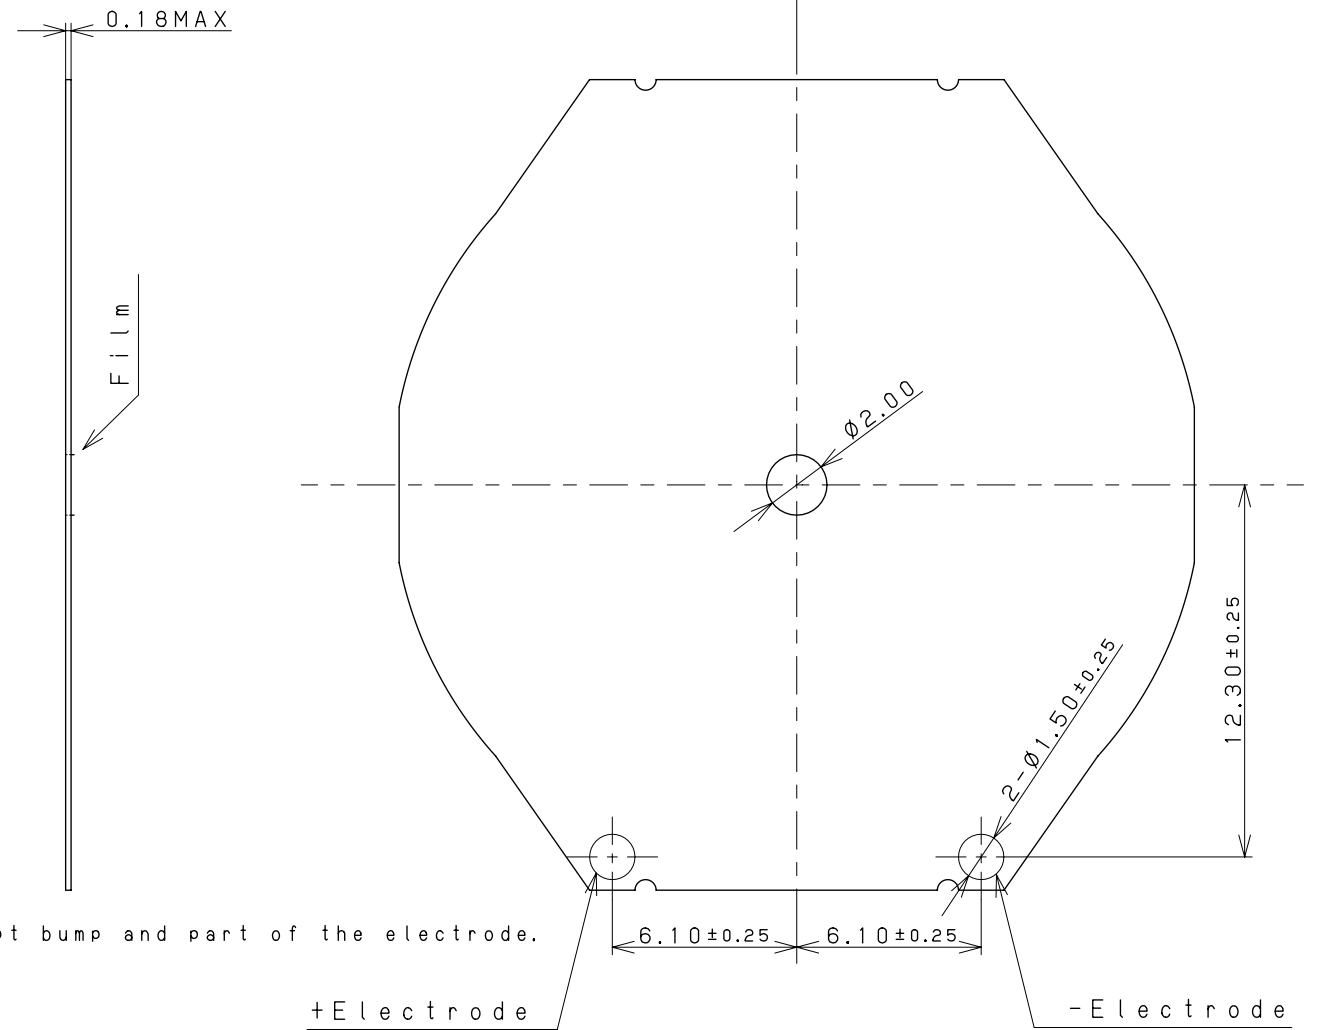

Except bump and part of the electrode.

+Electrode

-Electrode

GENERAL TOLERANCE : ±0.1
WARP : 2.0 MAX


SPECIFICATIONS (at 200Lx)

OPEN CIRCUIT VOLTAGE (V)	TYPICAL 4.2V		
SHORT CIRCUIT CURRENT (μA)	TYPICAL 15.3 μA		
OPERATION (μA)	TYPICAL 2.6V-14.6 μA	MORE THAN 2.6V-12.1 μA	

DR.		DATE May. 15, 2019	Δ		
CHK.		ORIGINAL DRAWING	Δ		
ENG.		TOLERANCE DECIMALS FRACTIONS ANGLES	SYM	DATE	DESCRIPTION No.
APP.		DIMENSION : mm SCALE 4 / 1	REVISIONS		
			FINISH	TITLE FILM SOLAR CELL	
			MATERIAL FILM	MODEL	
			WEIGHT		
			NO.	TENTATIVE NO. AT-26L0B	

Current- Voltage Characteristics of a cell for watch

at 200Lx FL 25°C

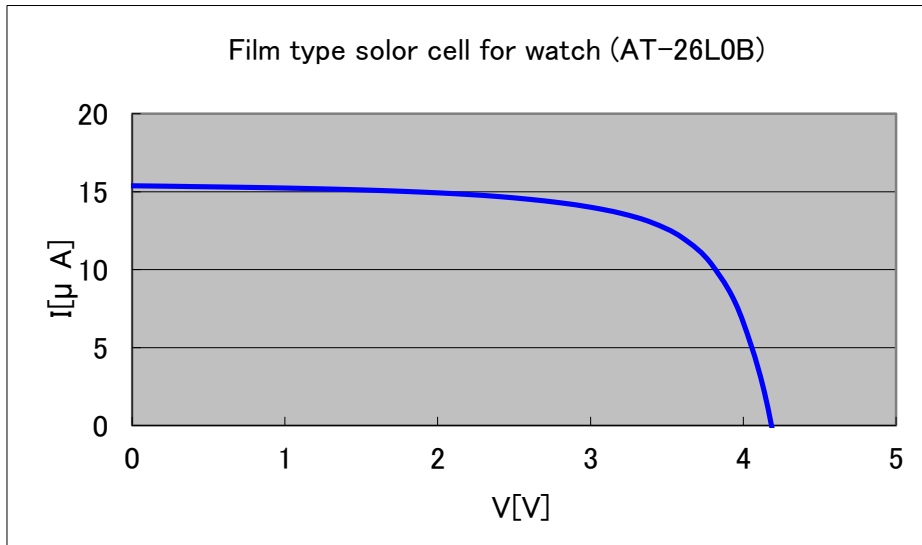

at 200lux FL^{※1} 25°C

Typical	Voc[V]	Iope(2.6V)[μ A]
	4.2	14.6

※1 fluorescent light

The data are meant to show a sample data only , not intended to guarantee the characteristics