


アモルファスシリコン太陽電池 仕様

Model : AM-8804C-T

1. Outside dimensions 外形寸法

Light Receiving Side (受光面)

Overcoat Side (オーバーコート面)

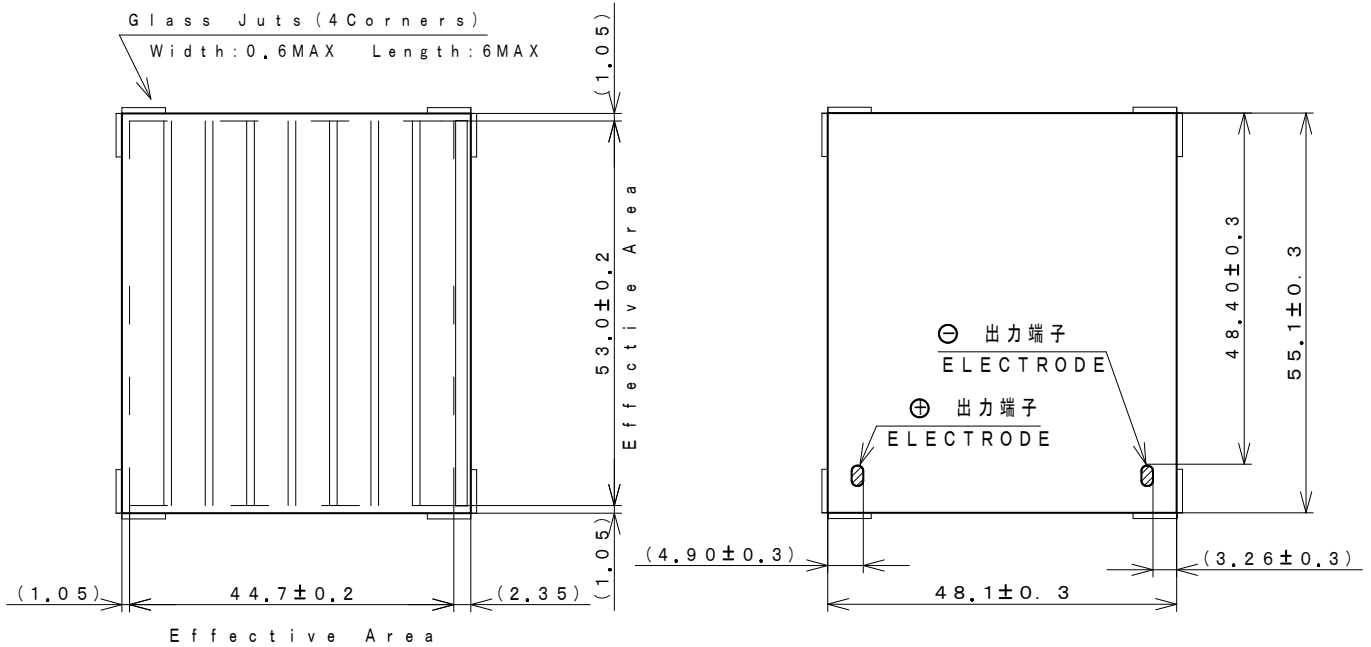

(dimension : mm)

Note

Glass Substrate Thickness (ガラス基板厚) : 1.6mm ± 0.2

Module Thickness (モジュール厚) : 2.0mmMAX

Accepts normal soldering for bending

(一般の半田を使用してリード線付けが可能です。)

2. Rated Specifications (at 25℃)

Item	Specifications (Initial)		
2.1 Open circuit voltage : Voc 開放電圧	Typical	6.8V	at 50kLx SS
2.2 Short circuit Current : Isc 短絡電流	Typical	16.3mA	at 50kLx SS
2.3 Operating Voltage & Operating Current : Vope-Iope 動作特性	Typical	4.5V - 12.0mA	at 50kLx SS
	Typical	4.5V - 15.1mA	at 50kLx SS
	Typical	4.5V - 33.3mA	at AM-1.5 100mW/cm ²
2.4 Maximum output : Pmax & optimum operating Volt : Vop optimum operating Current : Iop 最大出力	(reference)	74mW	Vop=5.2V Iop=14.2mA at 50kLx SS
	(reference)	156mW	Vop=5.2V Iop=30.0mA at AM-1.5 100mW/cm ²
2.5 Working temperature range : Topr 動作温度範囲		-10 to 60℃	
2.6 Storage temperature range : Tstg 保存温度範囲		-20 to 70℃	

SS: Solar Simulator



アモルファスシリコン太陽電池 仕様

Model : AM-8804CAR-T

1. Outside dimensions 外形寸法

Light Receiving Side (受光面)

Overcoat Side (オーバーコート面)

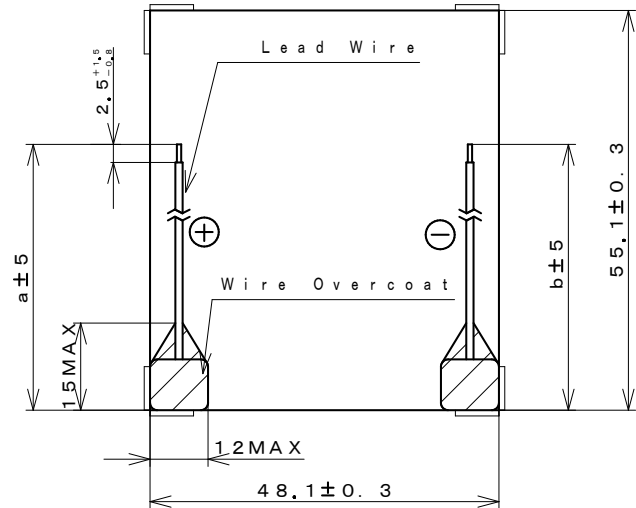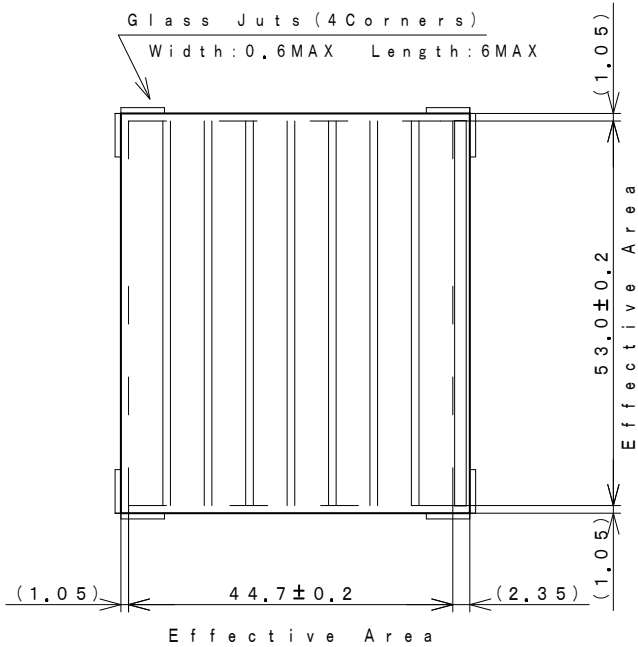

(dimension : mm)

Lead Wires : AWG28	
a : 90	b : 90

Note

Glass Substrate Thickness (ガラス基板厚) : 1.6mm ± 0.2

Module Thickness (モジュール厚) : 2.0mm MAX

Wire-Overcoat Thickness : 3.1mm MAX (including Module)
(リード線補正コート厚)

2. Rated Specifications (at 25°C)

Item	Specifications (Initial)
2.1 Open circuit voltage : Voc 開放電圧	Typical 6.8V at 50kLx SS
2.2 Short circuit Current : Isc 短絡電流	Typical 16.3mA at 50kLx SS
2.3 Operating Voltage & Operating Current : Vope-Iope 動作特性	Typical 4.5V - 12.0mA at 50kLx SS
	Typical 4.5V - 15.1mA at 50kLx SS
	Typical 4.5V - 33.3mA at AM-1.5 100mW/cm ²
2.4 Maximum output : Pmax & optimum operating Volt : Vop optimum operating Current : Iop 最大出力	(reference) 74mW Vop=5.2V Iop=14.2mA at 50kLx SS
	(reference) 156mW Vop=5.2V Iop=30.0mA at AM-1.5 100mW/cm ²
2.5 Working temperature range : Topr 動作温度範囲	-10 to 60°C
2.6 Storage temperature range : Tstg 保存温度範囲	-20 to 70°C

SS: Solar Simulator


I - V Characteristics

REFERENCE

1.Model : AM-8804

2.Outside Dimension : 48.1mm × 55.1mm

SS:Solar Simulator

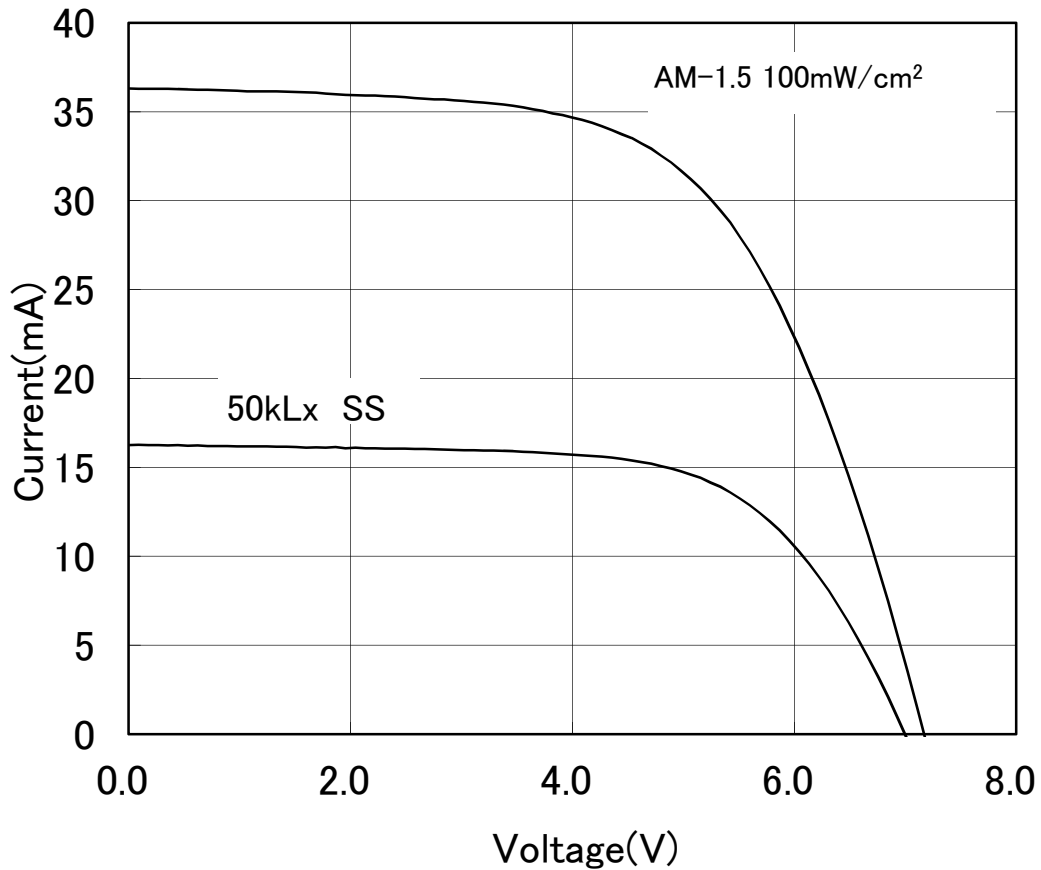

*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.

Panasonic Solar Amorton Co.,Ltd.

2019/7/2


出力の照度依存特性

REFERENCE

Dependence of Output on Illumination

1.Model : AM-8804

2.Outside Dimension : 48.1mm × 55.1mm

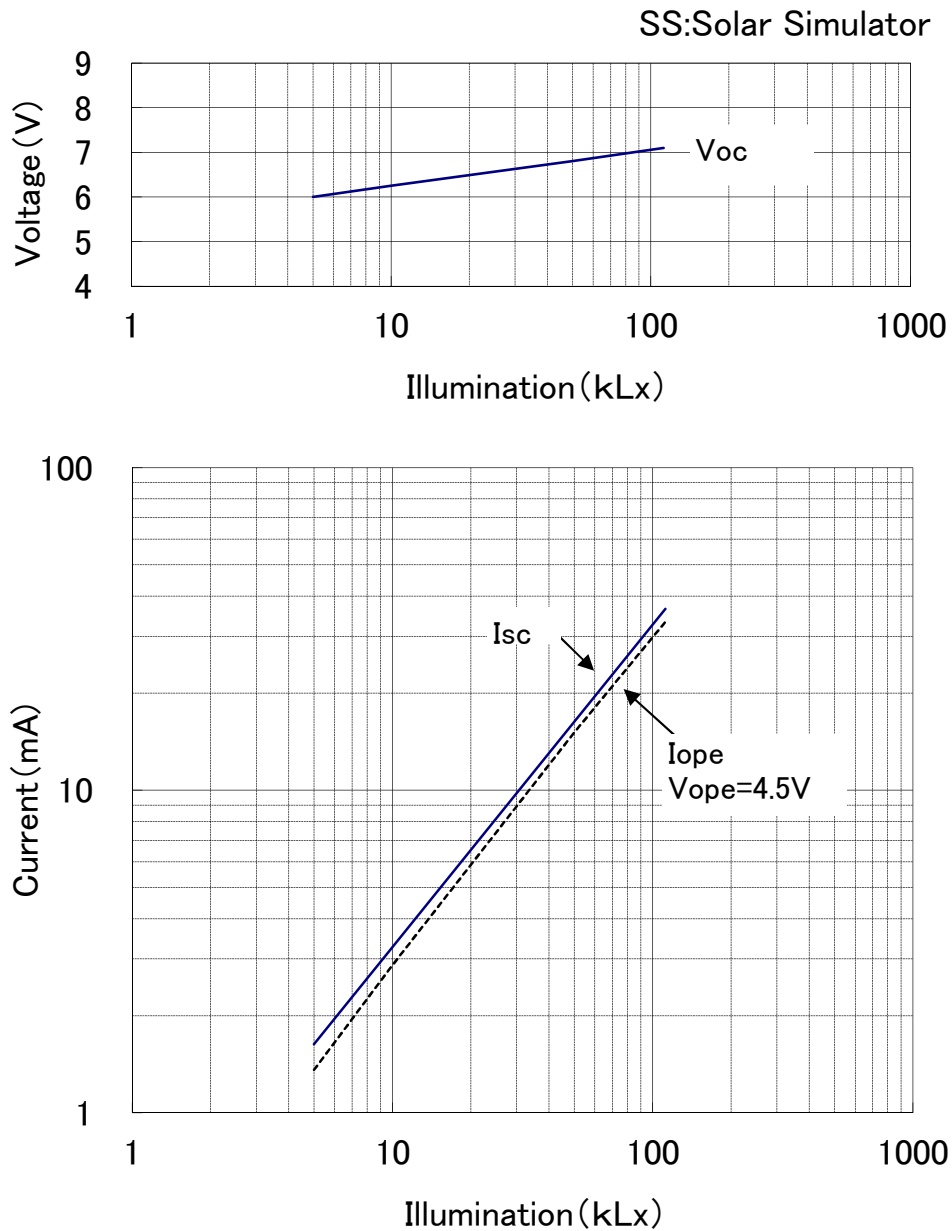

*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.



出力の温度依存特性

REFERENCE

Dependence of Output on Temperature

1.Model : AM-8804

2.Outside Dimension : 48.1mm × 55.1mm

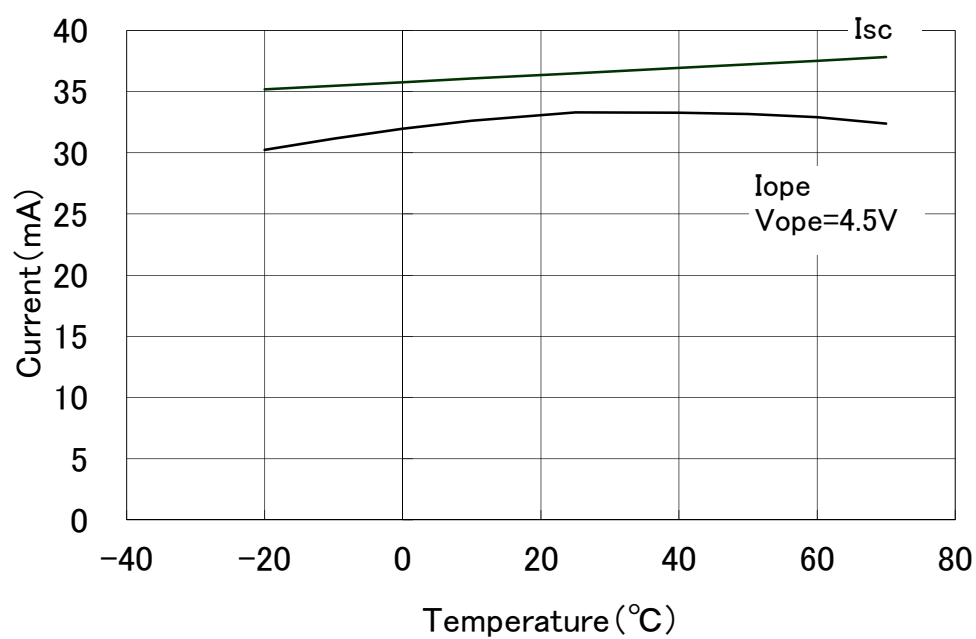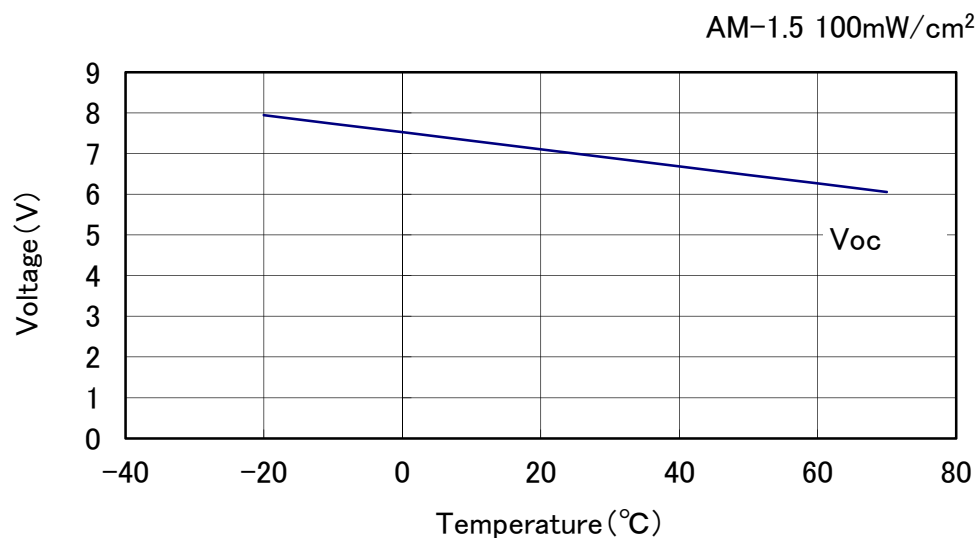

*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.